
Torque measuring device for bearings

Usage A device to inspect the bearing torque in a torque measuring device.

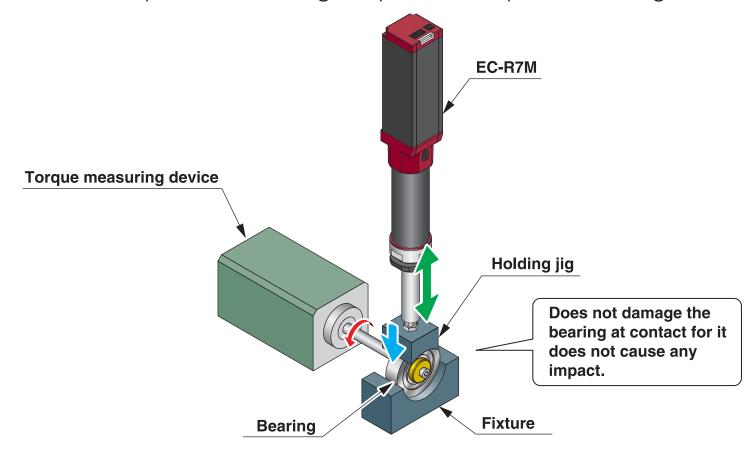

Explanation

When using an air cylinder, the speed and acceleration/deceleration were unstable, and the bearing was damaged by the impact caused by the holding jig.

The Elecylinder does not generate impact as it exerts a stable acceleration/deceleration, preventing it from damaging the bearing. Adoption of the Elecylinder enabled an easy adjustment for the acceleration/deceleration (A: acceleration, V: velocity, D: deceleration), improving the efficiency of setup change when changing product types.