

Direct Drive Motor **DDA**



# High Speed, High Payload, High Accuracy, and Introducing the Direct Drive Motor DDA Series





## Features

The Direct Drive Motor DDA Series is:

- The motor directly drives the rotary table without a speed reducing mechanism, such as a belt or speed reducer.
- Compact, high-speed and responsive.
- More affordable than the conventional DD series.

**1** Brake-equipped specifications have been added to the flange-less high torque/hollow type. Cleanroom specifications are also available.

Cleanliness Class <b>10</b>	Cleanliness Class <b>2.5</b>
(Fed.Std.209D)	(ISO14644-1)

		LT18C: Thin type (Rated torque: 8.4N·m)	LH18C: High torque type (Rated torque: 25N·m)
Large hollow bore type	Without brake (Standard/Cleanroom specification)	Hollow bore: $\phi 52\text{mm}$ 	Hollow bore: $\phi 52\text{mm}$ 
	With brake (Standard)	Hollow bore: $\phi 35\text{mm}$ 	Hollow bore: $\phi 35\text{mm}$ 

**2** Achieves a lower price

The price has been reduced by about 33% as compared with the conventional DD series.




**3** High speed, high acceleration/deceleration

Shorter positioning time means shorter cycle time of your equipment, resulting in greater productivity.


### <Comparison of Cycle Times>

Operating conditions: When a work part weighing 100g is placed on an aluminum disc of 300mm in diameter and 6mm in thickness and rotated by 180deg.

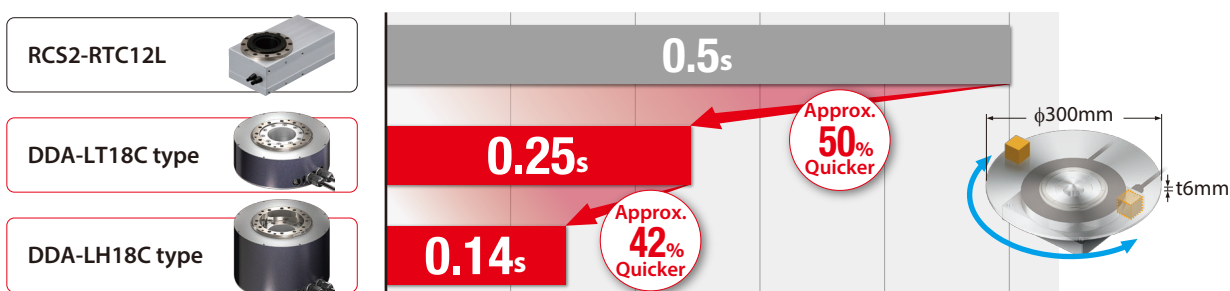


# Easy to Control!

## Boasting Ultimate Usability!!

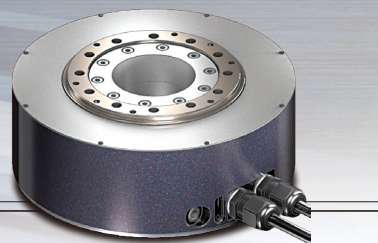

### 4 High torque, high payload

The high torque type has about three times more torque.

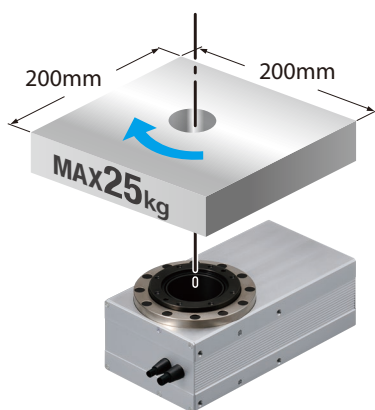


RCS2-RTC12L (Deceleration ratio: 1/30)

**Allowable inertia moment**

**0.17kg·m<sup>2</sup>**

Max. instantaneous torque: 8.6N·m

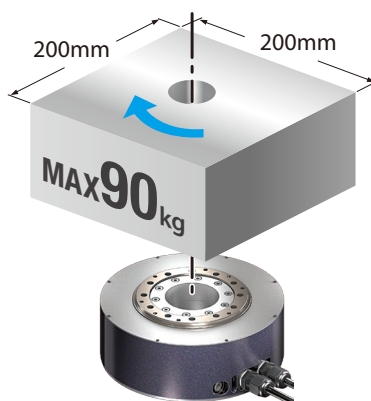

**DDA-LT18C type**

**Allowable inertia moment**

**0.60kg·m<sup>2</sup>**

Max. instantaneous torque: 25.2N·m



**DDA-LH18C type**

**Allowable inertia moment**

**1.8kg·m<sup>2</sup>**

Max. instantaneous torque: 75N·m

### 5 High-resolution type is available

	High resolution type	Standard type
Model number	DDA-L□18CP	DDA-L□18CS
Encoder resolution	20-bit 1,048,576 pulses/rev.	17-bit 131,072 pulses/rev.
Positioning repeatability	±0.00103 deg. (±3.7s)	±0.0055 deg. (±19.8s)

### 6 Corresponds to the indexing accuracy


It corresponds to the indexing accuracy when connected to SCON-CB, and allows for more accurate positioning.

	Encoder resolution	
	20-bit	17-bit
Indexing accuracy	±0.00833 deg. (±30s)	±0.01249 deg. (±45s)





## DDA Motor Series List

Type		Large bore, slim type		Large bore, high torque type	
Encoder		Standard (17-bit)	High resolution (20-bit)	Standard (17-bit)	High resolution (20-bit)
Model number	Standard	DDA-LT18CS	DDA-LT18CP	DDA-LH18CS	DDA-LH18CP
	Cleanroom spec.	DDACR-LT18CS	DDACR-LT18CP	DDACR-LH18CS	DDACR-LH18CP
External view					
Rated torque (N·m)		8.4		25	
Max. instantaneous torque (N·m)		25.2		75	
Rated speed (deg/s)		1,080		800	
Maximum speed (deg/s)		1,800		1,440	
Motor wattage (W)		200		600	
Size (φ)		φ180		φ180	
Height (mm)	w/o brake	70		122.8	
	w/ brake	115		187.3	
Hollow bore (φ)	w/o brake	φ52		φ52	
	w/ brake	φ35		φ35	
Mass (kg)	w/o brake	5.8		13	
	w/ brake	8.7		17.4	
Cleanliness *		Class 10 (Fed.Std.209D) Class 2.5 or equivalent (ISO 14644-1 Standard)		Class 10 (Fed.Std.209D) Class 2.5 or equivalent (ISO 14644-1 Standard)	
Encoder type		Index absolute/Multi-rotation absolute		Index absolute/Multi-rotation absolute	
Applicable controller		SCON-CB XSEL	SCON-CB	SCON-CB XSEL	SCON-CB
Reference page		P.5		P.9	

\* Cleanroom specification only

## Model Specification Items

DDA  
DDACR

Series

Type

Encoder Type

Motor Wattage

360

Operation Range

T2

Applicable Controllers

Cable Length

Options


DDA: Standard  
DDACR: Cleanroom specification

	Type	Encoder	AI	AM	360	360 deg.	T2	SCON	XSEL-P/Q	XSEL-R/S	N	None	A0	Cable exits from the bottom
LT18CS	Large bore, slim	Standard (17-bit)									S	3m	A1	Cable exits from the side
LT18CP	Large bore, slim	High resolution (20-bit)									M	5m	B	Brake
LH18CS	Large bore, high torque	Standard (17-bit)									X□□	Specified length	FL	Flange
LH18CP	Large bore, high torque	High resolution (20-bit)			200	200W								
					600	600W								


Note:  
Only SCON-CB  
can be selected  
for the high resolution  
encoder type (20-bit)

## Application Examples


**Index Table**  
 <Inspection device for small boards>

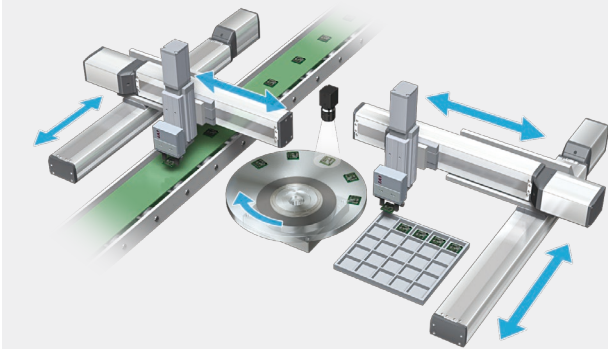


**Transport of Workpieces**  
 <Transporting parts from a conveyor to another>

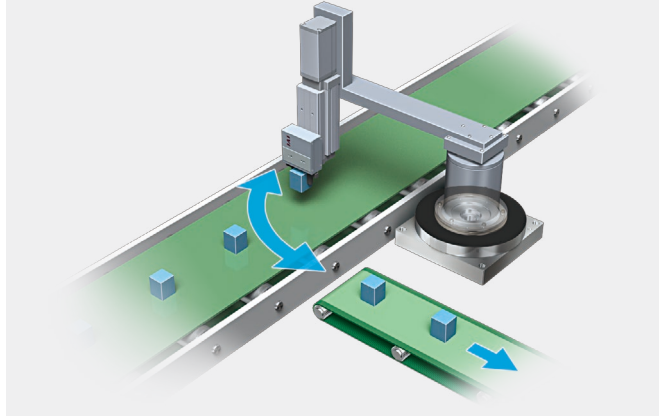

**Multi-rotation Operation**  
 <Transporting electronic components>

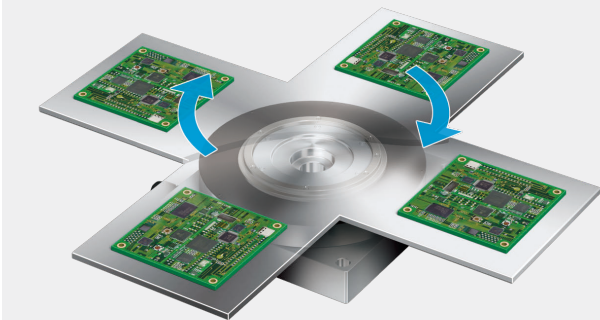

**Index Table**  
 <Parts assembly device>

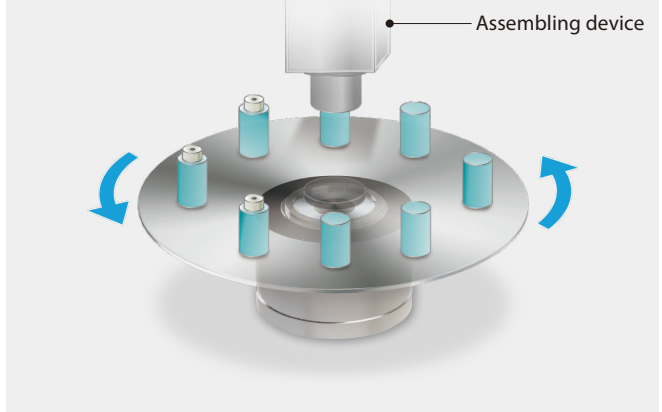


# DDA-LT18C

## DDACR-LT18C

Large Bore Type  
Slim Type  
Flange-Less Type  
Clean Room Type

Model Specification Items	DDA	DDACR	LT18C	Encoder Type	Motor Type	Operation Range	Applicable Controllers	Cable Length	Options
Series	DDA	DDACR	LT18C	AI	200	360	T2	N : None S : 3m M : 5m X : Specified length	Please refer to the options table below. * Please make sure to specify either A0 or A1 for the cable exit direction.
Type	Standard	Cleanroom specification	S : Standard (17-bit) P : High resolution (20-bit)	AI : Index absolute type AM : Multi-rotation absolute type	200: 200W	360: 360 deg.	T2 : SCON XSEL-P/Q XSEL-R/S Note: Only SCON for LT18CP		

\* Controller is not included.



\* Please refer to P.16 for more information on the installation method.



POINT Selection Notes	(Note 1) The value in ( ) indicates the maximum speed. The maximum speed may not be reached if the moving distance is short.
	(Note 2) Assuming that the actuator is operated 8 hours a day at the rated speed and smooth operation without shock, the actuator will reach its life in five years based on this load.
	(Note 3) The maximum cable length is 30m. Specify a desired length in meters. (Example: X08 = 8m)
	(Note 4) The index absolute type cannot be used in the pulse-train control and MECHATROLINK III control.
	(Note 5) Note that only the short-cut control is allowed when using XSEL with the index absolute type.

### Model/Specifications

Encoder type	Model number	Motor wattage (W)	Operation range (deg.) (*1)	Speed (deg./s) (Note 1)	Rated torque (N·m) (*2)	Maximum instantaneous torque (N·m)	Allowable inertia moment (kg·m <sup>2</sup> )	Rotor inertia (kg·m <sup>2</sup> )
17-bit index absolute type	DDA (CR)-LT18CS-AI-200-360-T2-①-②	200	0~359.999 deg.	1~1,080 (1~1,800)	8.4	25.2	0.6	0.0043
17-bit multi-rotation absolute type	DDA (CR)-LT18CS-AM-200-360-T2-①-②		±9,999 deg. max.					
20-bit index absolute type	DDA (CR)-LT18CP-AI-200-360-T2-①-②		0~359.999 deg.					
20-bit multi-rotation absolute type	DDA (CR)-LT18CP-AM-200-360-T2-①-②		±2,520 deg. max.					

Legend: ① Cable length ② Option

(\*1) SCON and XSEL have different minimum resolutions. Please refer to the instruction manual for more information.  
(\*2) The value when installed on an IAI rated heat dissipating plate. Please refer to P.16 for more information.

### ① Cable Length

Cable type	Cable code
Standard	S (3m) M (5m)
Specified length	X06 (6m) ~X10 (10m) X11 (11m) ~X30 (30m)


\* Please refer to P.18 for more information regarding the maintenance cables.

### ② Options

Name	Option code
Cable exits from the bottom	A0
Cable exits from the side	A1
Flange	FL

(Note) A0 (cable exits from the bottom) option and FL (flange) option cannot be selected together.

### Run-out of Output Shaft

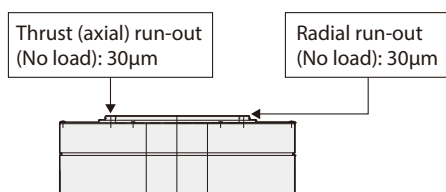

### Common Specifications

Item	Description
Drive system	Direct drive motor
Positioning repeatability	17-bit: ±0.0055deg. (±19.8s); 20-bit: ±0.00103deg. (±3.7s)
Indexing accuracy *1	17-bit: ±0.01249deg. (±45s); 20-bit: ±0.00833deg. (±30s)
Allowable load moment (Note 2)	80N·m
Encoder resolution	17-bit: 131,072 pulses/rev. 20-bit: 1,048,576 pulses/rev.
Allowable thrust load (Note 2)	Forward: 3,100N; Reverse: 250N
Base material	Aluminum
Ambient operating temp. & humidity	0~40°C, 20~85% (Non-condensing)
Cleanroom specification	Cleanliness Class 10 (Fed.Std.209D), class 2.5 or equivalent (ISO 14644-1 Standard) Suction amount 35Nℓ/min
Weight	5.8kg

\*1 Indexing accuracy is supported when connected to SCON-CB.

## Dimensions


CAD drawings can be downloaded from our website.  
[www.intelligentactuator.com](http://www.intelligentactuator.com)

2D  
CAD

3D  
CAD


### Cable exits from the bottom

(Option code: A0)

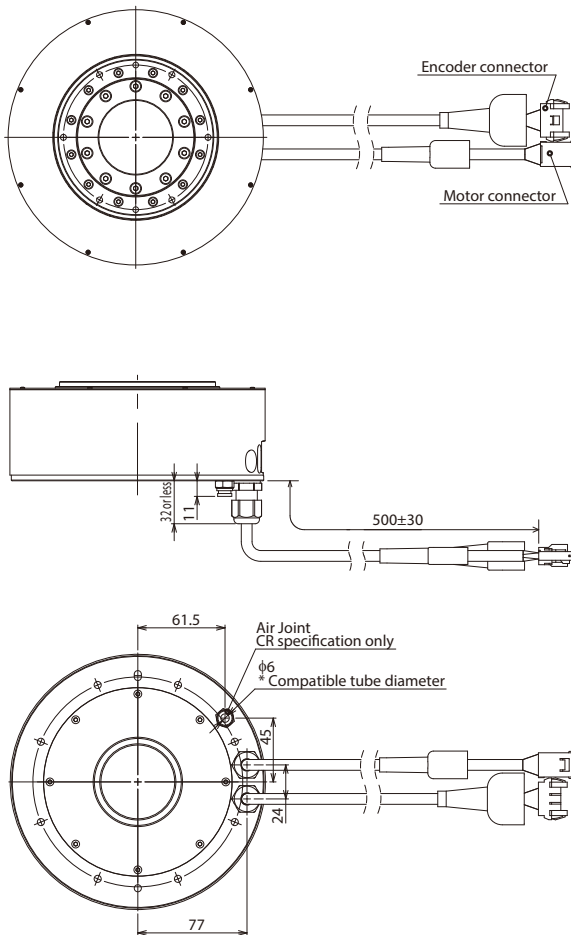




### Cable exits from the side

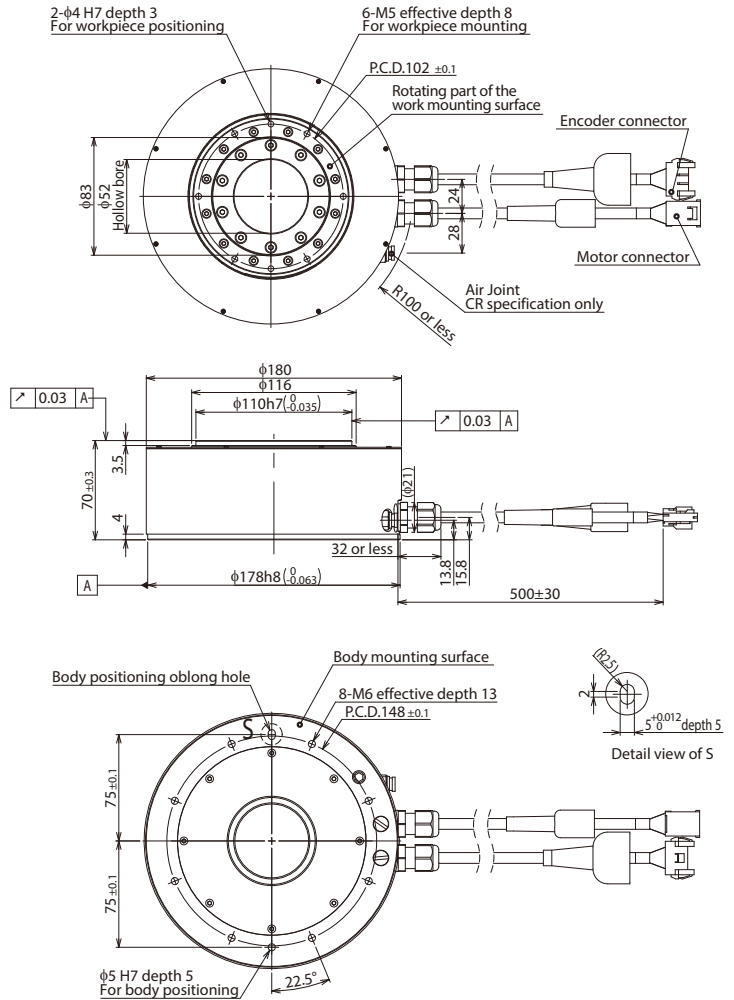(Option code: A1)



## Applicable Controllers

The DDA series actuators can be operated by the controllers indicated below. Please select the type depending on your intended use.

Name	External view	Max. number of controlled axes	Power supply voltage	Control method				Maximum number of positioning points	Reference page
				Positioner	Pulse-train	Program	Network *Option		
SCON-CB/CGB		1	Single-phase 200VAC	●	●	-	DeviceNet CC-Link CompoNet MECHATROLINK EtherCAT EtherNet/IP	512 (768 for network spec.)	P.14
SCON-LC/LCG		1	Single-phase 200VAC	-	-	●	EtherCAT EtherNet/IP	512 (768 for network spec.)	P.14
XSEL-P/Q/R/S		8	Single-phase 200VAC Three-phase 200VAC	-	-	●	Note: The type of compatible networks will vary depending on the controller. Please refer to reference page for more information.	53,332 (Depending on the type)	P.15

\* LT18CP can only be operated by SCON. \* Please refer to P.16 for the precautions in selecting controllers.

## DDA-LT18C-B

Large  
Bore  
TypeSlim  
TypeFlange-  
Less  
Type■ Model  
Specification  
Items

DDA — LT18C

Series

Type

Encoder  
TypeMotor  
TypeOperation  
RangeApplicable  
ControllersCable  
Length

Options

Option

S : Standard  
(17-bit)  
P : High resolution  
(20-bit)AI : Index  
absolute type  
AM : Multi-rotation  
absolute type

200: 200W

360: 360 deg.



T2

: SCON  
XSEL-P/Q  
XSEL-R/S  
Note: Only SCON  
for LT18CPN : None  
S : 3m  
M : 5m  
X□□ : Specified  
lengthPlease refer to the  
options table below.  
\* Please make sure to  
specify either  
A0 or A1 for the cable  
exit direction.

B: Brake

\* Controller is not included.

RoHS

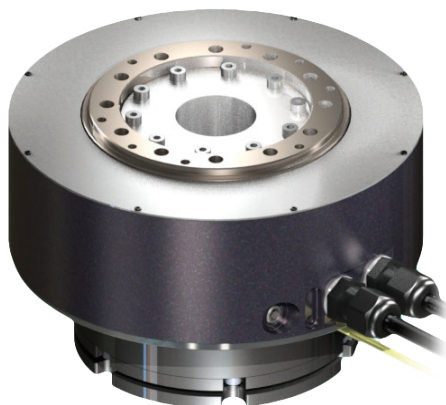\* Please refer to P.16 for  
more information on  
the installation method.POINT  
Selection  
Notes

- (Note 1) The value in ( ) indicates the maximum speed. The maximum speed may not be reached if the moving distance is short.
- (Note 2) Assuming that the actuator is operated 8 hours a day at the rated speed and smooth operation without shock, the actuator will reach its life in five years based on this load.
- (Note 3) The maximum cable length is 20m. Specify a desired length in meters. (Example: X08 = 8m)
- (Note 4) The index absolute type cannot be used in the pulse-train control and MECHATROLINK III control.
- (Note 5) Note that only the short-cut control is allowed when using XSEL with the index absolute type.
- (Note 6) The brake is used for retention purposes only, so damage may be caused if it is actually used in attempts to slow or stop the actuator.

## Model/Specifications

Encoder type	Model number	Motor wattage (W)	Operation range (deg.) (*1)	Speed (deg./s) (Note 1)	Rated torque (N·m) (*2)	Maximum instantaneous torque (N·m)	Allowable inertia moment (kg·m <sup>2</sup> )	Rotor inertia (kg·m <sup>2</sup> )
17-bit index absolute type	DDA-LT18CS-AI-200-360-T2-①-②-B	200	0~359.999 deg.	1~1,080 (1~1,800)	8.4	25.2	0.6	0.0043
17-bit multi-rotation absolute type	DDA-LT18CS-AM-200-360-T2-①-②-B		±9,999 deg. max.					
20-bit index absolute type	DDA-LT18CP-AI-200-360-T2-①-②-B		0~359.999 deg.					
20-bit multi-rotation absolute type	DDA-LT18CP-AM-200-360-T2-①-②-B		±2,520 deg. max.					

Legend: ① Cable length ② Option


(\*1) SCON and XSEL have different minimum resolutions. Please refer to the instruction manual for more information.  
(\*2) The value when installed on an IAI rated heat dissipating plate. Please refer to P.16 for more information.

## ② Options

Name	Option code
Cable exits from the bottom	A0
Cable exits from the side	A1
Brake (With brake box) *1	B

\*1 A brake cable is not supplied if "N (None)" is selected as the cable length.  
Please order a brake cable as a separate item in that case.

## Run-out of Output Shaft

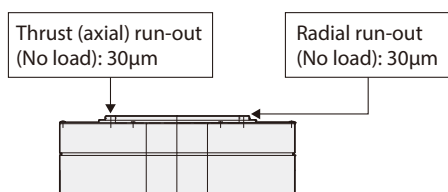

## ① Cable Length

Cable type	Cable code
Standard	S (3m) M (5m)
Specified length	X06 (6m) ~X10 (10m) X11 (11m) ~X20 (20m)

\* Please refer to P.18 for more information regarding the maintenance cables.

## Common Specifications

Item	Description
Drive system	Direct drive motor
Positioning repeatability	17-bit: ±0.0055deg. (±19.8s); 20-bit: ±0.00103deg. (±3.7s)
Indexing accuracy *1	17-bit: ±0.01249deg. (±45s); 20-bit: ±0.00833deg. (±30s)
Allowable load moment (Note 2)	80N·m
Encoder resolution	17-bit: 131,072 pulses/rev. 20-bit: 1,048,576 pulses/rev.
Allowable thrust load (Note 2)	Forward: 3,100N; Reverse: 250N
Brake retaining torque	25N·m
Base material	Aluminum
Ambient operating temp. & humidity	0~40°C, 20~85% (Non-condensing)
Weight	8.7kg

\*1 Indexing accuracy is supported when connected to SCON-CB.





# DDA-LH18C

## DDACR-LH18C

Clean Room Type


Large Bore Type

High Torque Type


Flange-Less Type

Model Specification Items	DDA	DDACR	LH18C	Encoder Type	Motor Type	Operation Range	Applicable Controllers	Cable Length	Options
Series	DDA	DDACR	LH18C	AI	600	360	T2	N : None S : 3m M : 5m X□□ : Specified length	Please refer to the options table below. * Please make sure to specify either A0 or A1 for the cable exit direction.
Type	Standard	Cleanroom specification	S : Standard (17-bit) P : High resolution (20-bit)	AI : Index absolute type AM : Multi-rotation absolute type	600 : 600W	360 : 360 deg.	T2 : SCON XSEL-P/Q XSEL-R/S Note: Only SCON for LH18CP		

\* Controller is not included.



\* Please refer to P.16 for more information on the installation method.

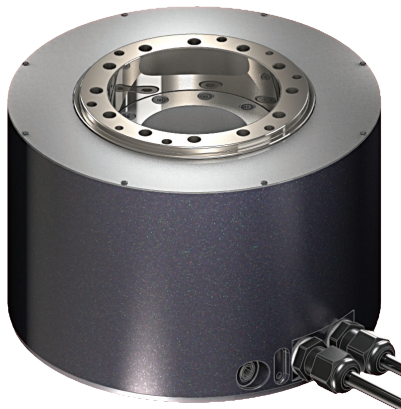

POINT Selection Notes	(Note 1) The value in ( ) indicates the maximum speed. The maximum speed may not be reached if the moving distance is short.
	(Note 2) Assuming that the actuator is operated 8 hours a day at the rated speed and smooth operation without shock, the actuator will reach its life in five years based on this load.
	(Note 3) The maximum cable length is 30m. Specify a desired length in meters. (Example: X08 = 8m)
	(Note 4) The index absolute type cannot be used in the pulse-train control and MECHATROLINK III control.
	(Note 5) Note that only the short-cut control is allowed when using XSEL with the index absolute type.

### Model/Specifications

Encoder type	Model number	Motor wattage (W)	Operation range (deg.) (*1)	Speed (deg./s) (Note 1)	Rated torque (N·m) (*2)	Maximum instantaneous torque (N·m)	Allowable inertia moment (kg·m <sup>2</sup> )	Rotor inertia (kg·m <sup>2</sup> )
17-bit index absolute type	DDA (CR)-LH18CS-AI-600-360-T2-①-②	600	0~359.999 deg.	1~800 (1~1,440)	25	75	1.8	0.0092
17-bit multi-rotation absolute type	DDA (CR)-LH18CS-AM-600-360-T2-①-②		±9,999 deg. max.					
20-bit index absolute type	DDA (CR)-LH18CP-AI-600-360-T2-①-②		0~359.999 deg.					
20-bit multi-rotation absolute type	DDA (CR)-LH18CP-AM-600-360-T2-①-②		±2,520 deg. max.					

Legend: ① Cable length ② Option

(\*1) SCON and XSEL have different minimum resolutions. Please refer to the instruction manual for more information.  
(\*2) The value when installed on an IAI rated heat dissipating plate. Please refer to P.16 for more information.

### ① Cable Length

Cable type	Cable code
Standard	S (3m) M (5m)
Specified length	X06 (6m) ~X10 (10m) X11 (11m) ~X30 (30m)


\* Please refer to P.18 for more information regarding the maintenance cables.

### ② Options

Name	Option code
Cable exits from the bottom	A0
Cable exits from the side	A1
Flange	FL

(Note) A0 (cable exits from the bottom) option and FL (flange) option cannot be selected together.

### Run-out of Output Shaft

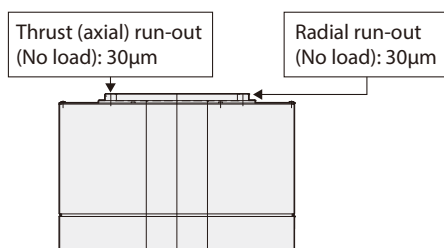

### Common Specifications

Item	Description
Drive system	Direct drive motor
Positioning repeatability	17-bit: ±0.0055deg. (±19.8s); 20-bit: ±0.00103deg. (±3.7s)
Indexing accuracy *1	17-bit: ±0.01249deg. (±45s); 20-bit: ±0.00833deg. (±30s)
Allowable load moment (Note 2)	80N·m
Encoder resolution	17-bit: 131,072 pulses/rev. 20-bit: 1,048,576 pulses/rev.
Allowable thrust load (Note 2)	Forward: 3,100N; Reverse: 250N
Base material	Aluminum
Ambient operating temp. & humidity	0~40°C, 20~85% (Non-condensing)
Cleanroom specification	Cleanliness Class 10 (Fed.Std.209D), class 2.5 or equivalent (ISO 14644-1 Standard) Suction amount 35Nℓ/min
Weight	13kg

\*1 Indexing accuracy is supported when connected to SCON-CB.


## Dimensions

CAD drawings can be downloaded from our website.  
**[www.intelligentactuator.com](http://www.intelligentactuator.com)**




Cable exits from the bottom

(Option code: A0)

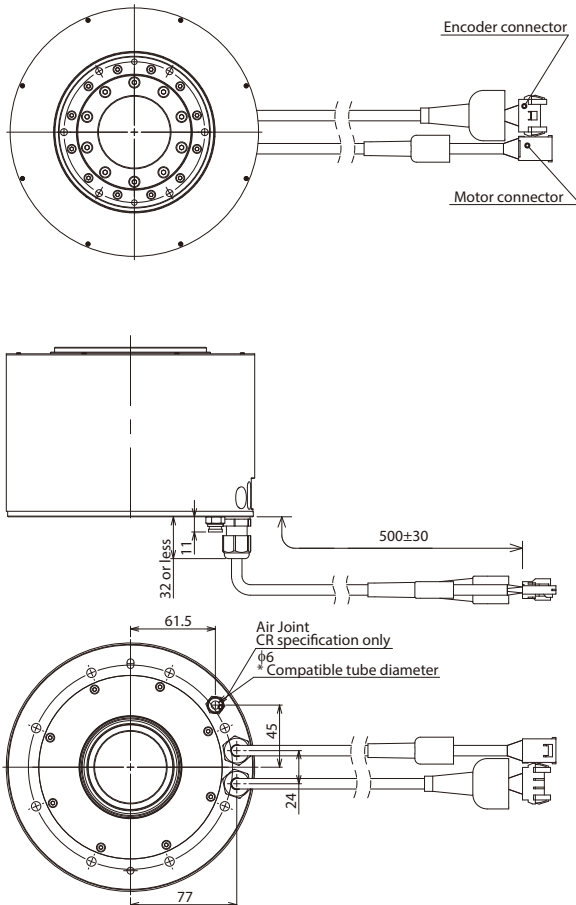





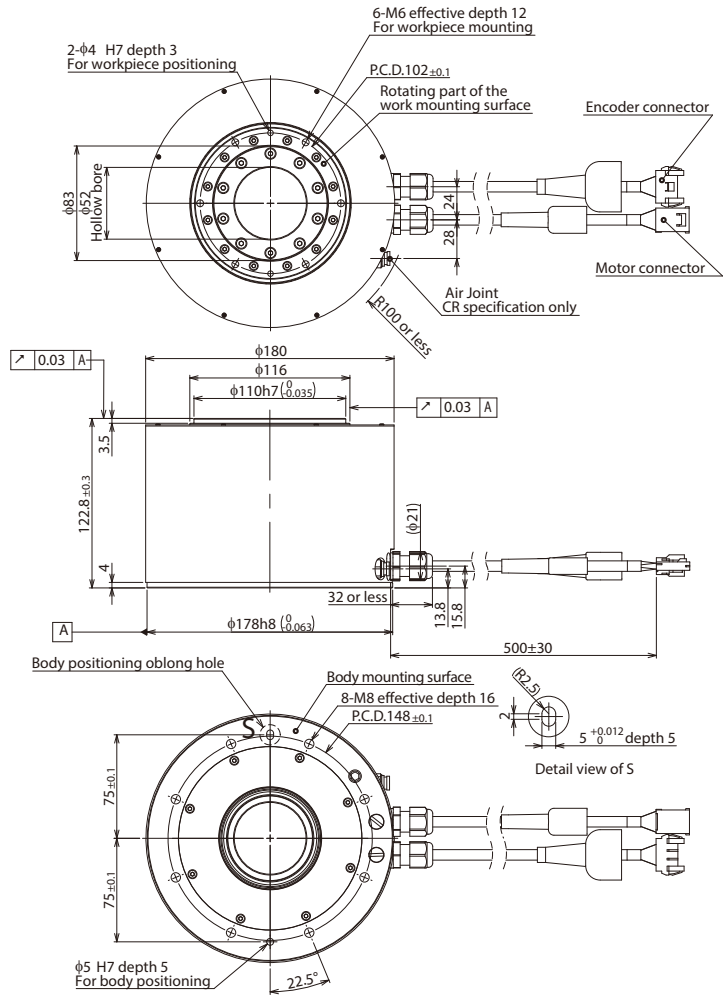





### Cable exits from the side

(Option code: A1)



## Applicable Controllers

The DDA series actuators can be operated by the controllers indicated below. Please select the type depending on your intended use.

Name	External view	Max. number of controlled axes	Power supply voltage	Control method				Maximum number of positioning points	Reference page
				Positioner	Pulse-train	Program	Network *Option		
SCON-CB/CGB		1	Single-phase 200VAC	●	●	-	      	512 (768 for network spec.)	P.14
SCON-LC/LCG		1	Single-phase 200VAC	-	-	●		512 (768 for network spec.)	P.14
XSEL-P/Q/R/S		8	Single-phase 200VAC Three-phase 200VAC	-	-	●		53,332 (Depending on the type)	P.15

\* LH18CP can only be operated by SCON. \* Please refer to P.16 for the precautions in selecting controllers.

# DDA-LH18C-B

Large Bore Type High Torque Type Flange-Less Type

## Model Specification Items

**DDA** — **LH18C** — **AI** — **600** — **360** — **T2** — **N** — **B**

Series — Type — Encoder Type — Motor Type — Operation Range — Applicable Controllers — Cable Length — Options — Option

S: Standard (17-bit)  
P: High resolution (20-bit)

AI: Index absolute type  
AM: Multi-rotation absolute type

600: 600W  
360: 360 deg.

T2: XSEL-P/Q  
XSEL-R/S  
Note: Only XSEL for LH18CP


N: None  
S: 3m  
M: 5m  
X□□: Specified length

Please refer to the options table below.  
\* Please make sure to specify either A0 or A1 for the cable exit direction.


B: Brake

\* Controller is not included.

RoHS



\* Please refer to P.16 for more information on the installation method.

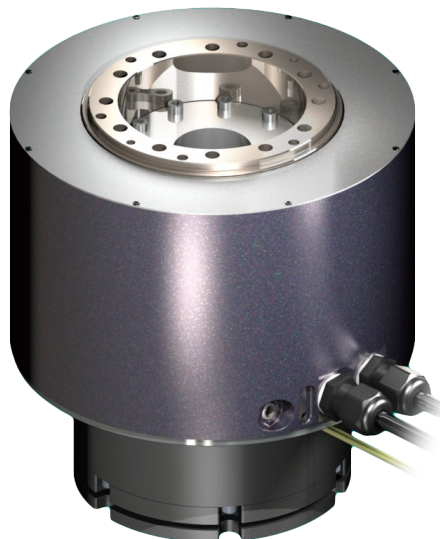

POINT  
Selection Notes

- (Note 1) The value in ( ) indicates the maximum speed. The maximum speed may not be reached if the moving distance is short.
- (Note 2) Assuming that the actuator is operated 8 hours a day at the rated speed and smooth operation without shock, the actuator will reach its life in five years based on this load.
- (Note 3) The maximum cable length is 20m. Specify a desired length in meters. (Example: X08 = 8m)
- (Note 4) The index absolute type cannot be used in the pulse-train control and MECHATROLINK III control.
- (Note 5) Note that only the short-cut control is allowed when using XSEL with the index absolute type.
- (Note 6) The brake is used for retention purposes only, so damage may be caused if it is actually used in attempts to slow or stop the actuator.

## Model/Specifications

Encoder type	Model number	Motor wattage (W)	Operation range (deg.) (*1)	Speed (deg./s) (Note 1)	Rated torque (N·m) (*2)	Maximum instantaneous torque (N·m)	Allowable inertia moment (kg·m <sup>2</sup> )	Rotor inertia (kg·m <sup>2</sup> )
17-bit index absolute type	DDA-LH18CS-AI-600-360-T2-①-②-B	600	0~359.999 deg.	1~800 (1~1,440)	25	75	1.8	0.0092
17-bit multi-rotation absolute type	DDA-LH18CS-AM-600-360-T2-①-②-B		±9,999 deg. max.					
20-bit index absolute type	DDA-LH18CP-AI-600-360-T2-①-②-B		0~359.999 deg.					
20-bit multi-rotation absolute type	DDA-LH18CP-AM-600-360-T2-①-②-B		±2,520 deg. max.					

Legend: ① Cable length ② Option


(\*1) XSEL and XSEL have different minimum resolutions. Please refer to the instruction manual for more information.  
(\*2) The value when installed on an IAI rated heat dissipating plate. Please refer to P.16 for more information.

## ② Options

Name	Option code
Cable exits from the bottom	A0
Cable exits from the side	A1
Brake (With brake box) *1	B

\*1 A brake cable is not supplied if "N (None)" is selected as the cable length. Please order a brake cable as a separate item in that case.

## Run-out of Output Shaft

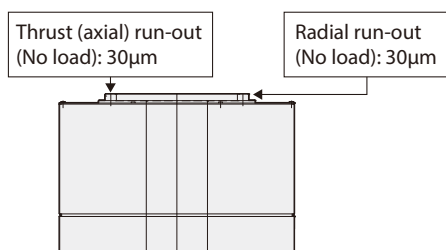

## ① Cable Length

Cable type	Cable code
Standard	S (3m) M (5m)
Specified length	X06 (6m) ~X10 (10m) X11 (11m) ~X20 (20m)

\* Please refer to P.18 for more information regarding the maintenance cables.

## Common Specifications

Item	Description
Drive system	Direct drive motor
Positioning repeatability	17-bit: ±0.0055deg. (±19.8s); 20-bit: ±0.00103deg. (±3.7s)
Indexing accuracy *1	17-bit: ±0.01249deg. (±45s); 20-bit: ±0.00833deg. (±30s)
Allowable load moment (Note 2)	80N·m
Encoder resolution	17-bit: 131,072 pulses/rev. 20-bit: 1,048,576 pulses/rev.
Allowable thrust load (Note 2)	Forward: 3,100N; Reverse: 250N
Base material	Aluminum
Brake retaining torque	50N·m
Ambient operating temp. & humidity	0~40°C, 20~85% (Non-condensing)
Weight	17.4kg

\*1 Indexing accuracy is supported when connected to XSEL-CB.



## Dimensions


CAD drawings can be downloaded from our website.  
[www.intelligentactuator.com](http://www.intelligentactuator.com)

2D  
CAD

3D  
CAD


### Cable exits from the bottom

(Option code: A0)

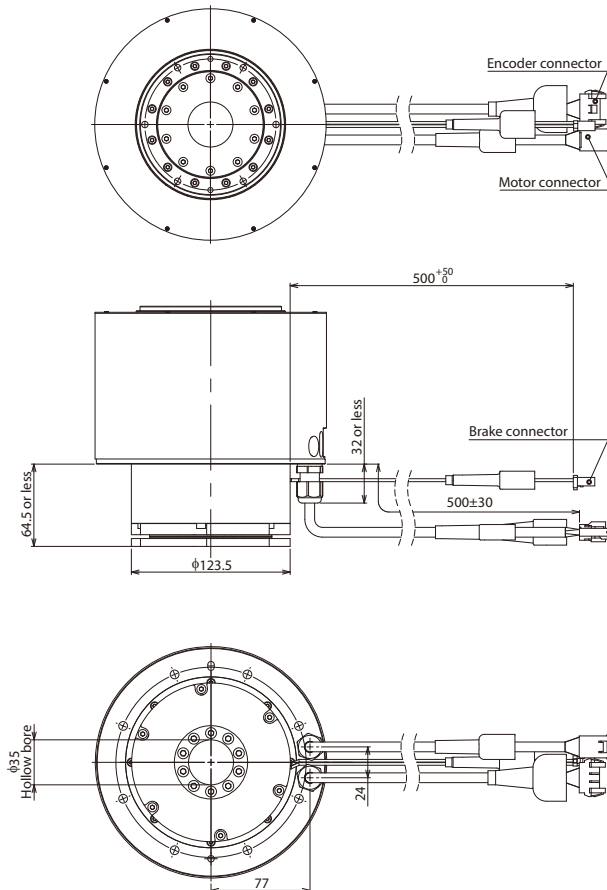




### Cable exits from the side

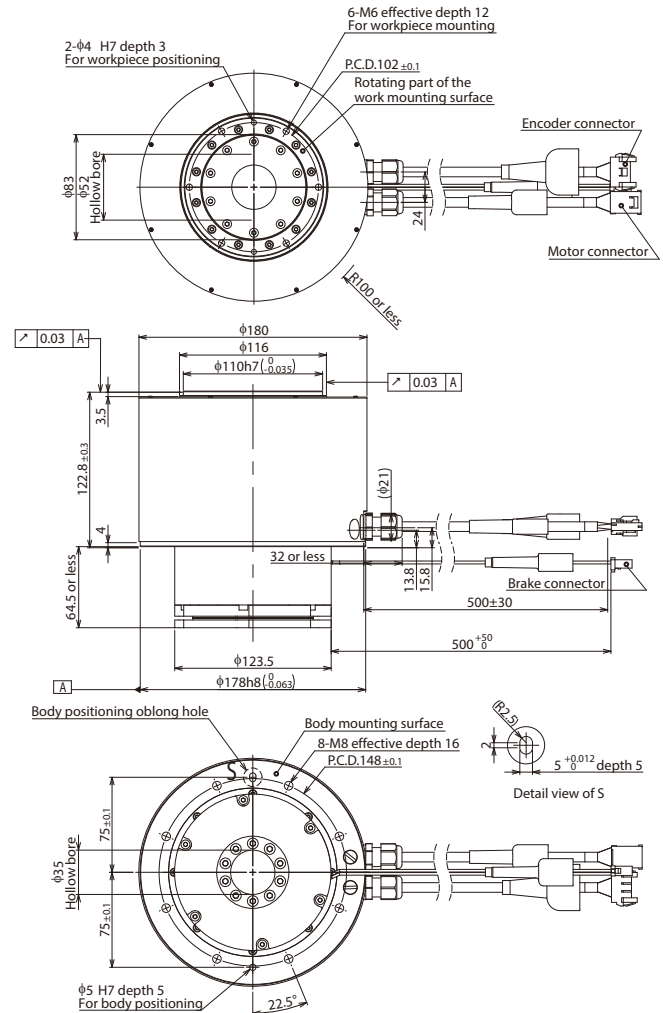(Option code: A1)



## Applicable Controllers

The DDA series actuators can be operated by the controllers indicated below. Please select the type depending on your intended use.

Name	External view	Max. number of controlled axes	Power supply voltage	Control method				Maximum number of positioning points	Reference page
				Positioner	Pulse-train	Program	Network *Option		
SCON-CB/CGB		1	Single-phase 200VAC	●	●	-	DeviceNet CC-Link CANopen CompoNet MECHATROLINK EtherCAT EtherNet/IP PROFINET	512 (768 for network spec.)	P.14
SCON-LC/LCG		1	Single-phase 200VAC	-	-	●	DeviceNet CC-Link CANopen CompoNet MECHATROLINK EtherCAT EtherNet/IP PROFINET	512 (768 for network spec.)	P.14
XSEL-P/Q/R/S		8	Single-phase 200VAC Three-phase 200VAC	-	-	●	Note: The type of compatible networks will vary depending on the controller. Please refer to reference page for more information.	53,332 (Depending on the type)	P.15

\* LH18CP can only be operated by SCON. \* Please refer to P.16 for the precautions in selecting controllers.


# Options

## Brake Option Code: B

It is a retention mechanism for holding the stop position when the power or servo is OFF to prevent the workpieces and attachments from being damaged when used in side or vertical positions. Be sure to connect a brake box for models with brake.

### ■ Brake Box

Model Number: IA-110-DD-4

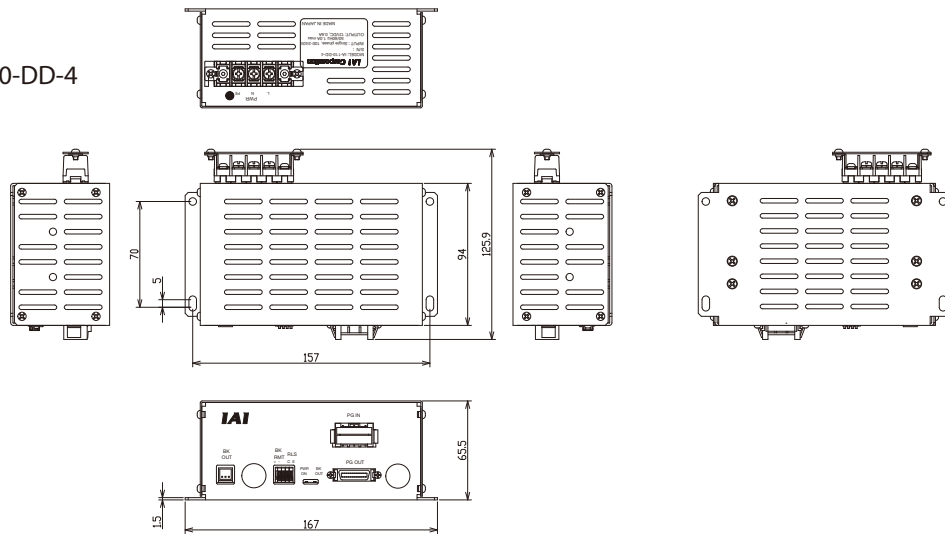

### ■ Wiring Diagram When Brake Box is Used




DDA

Encoder cable  
Model: CB-X3-PA□□□□

Brake cable  
Model: CB-DDB-BK□□□□

Motor cable  
Model: CB-X(XMC)-MA□□□□



Brake box

Encoder cable  
Model: CB-X3-PA010  
(Comes with the brake box)

Main power supply  
100VAC~240VAC




Controller  
SCON-CB  
XSEL-P/Q/R/S

## Flange Option Code: FL

A bracket that attaches to the body with bolts from the top side.


DDA-LT18C

Model Number: DDA-FL-LT18

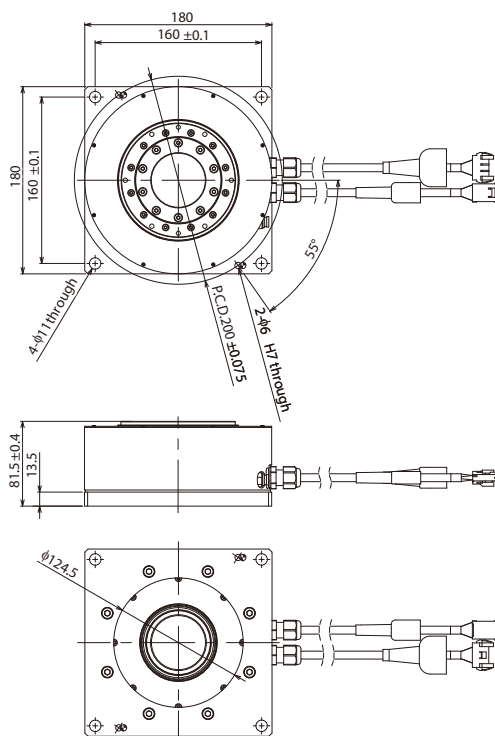

DDA-LH18C

Model Number: DDA-FL-LH18

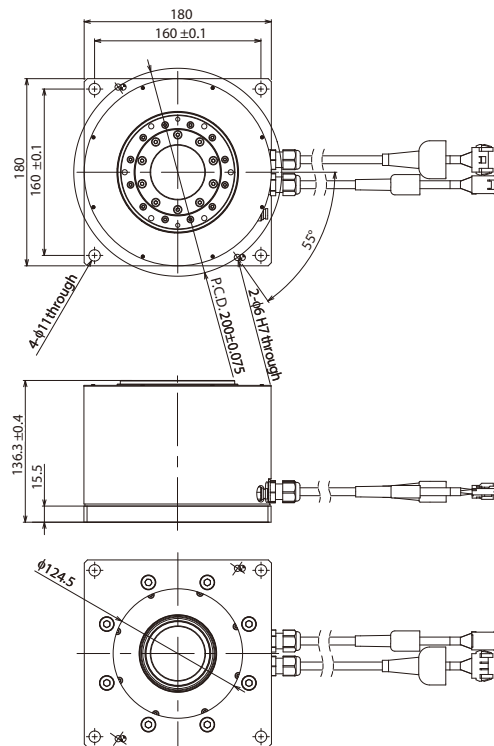



# X-SEL

## Program Controller




### List of Models

Model	P	Q	R	S
Type	Large-capacity type	Large-capacity type (Safety category specification)	High-function type	High-function type (Safety category specification)
External view				
Description	Large-capacity type that can control up to 6 axes / 2,400W	Large-capacity type that's compatible with the safety category 4	High-function type that allows up to 8-axis operation	Safety category 4 compatible high-function type


### Controller Model

#### Program Multi-axis Type <XSEL> Model

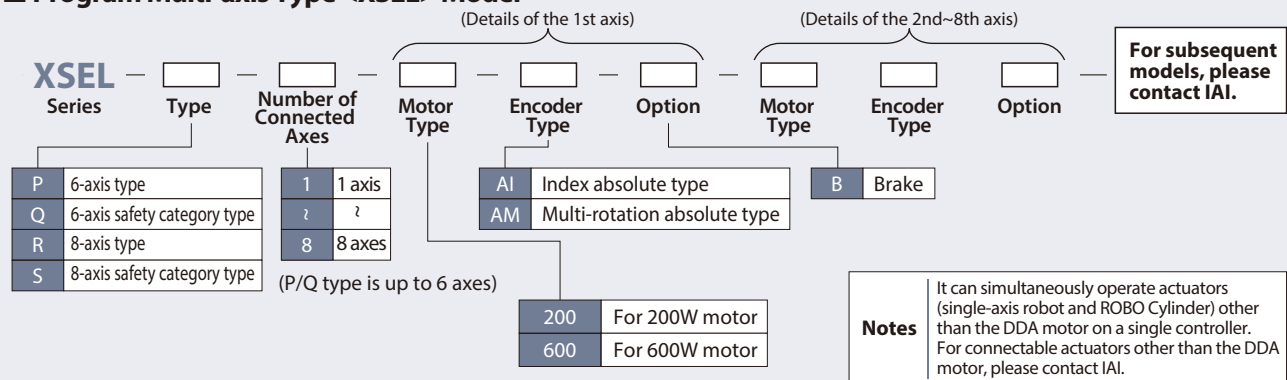

### System Configuration



#### When the XSEL Controller is Connected

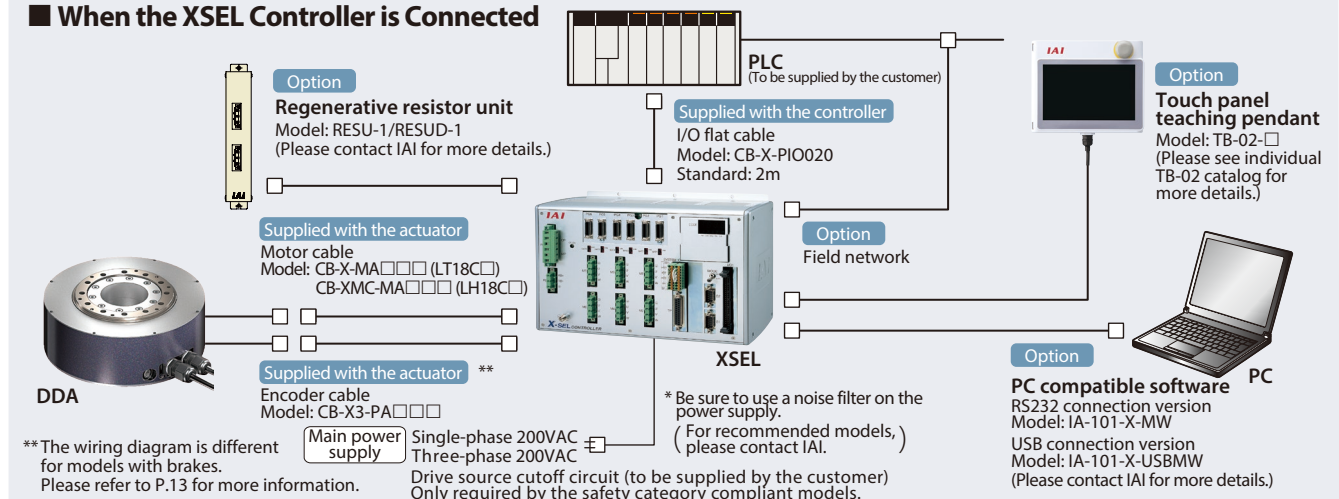



## Precautions


### ■ Installation

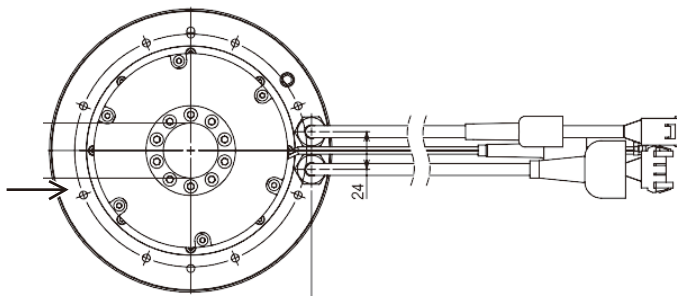

(Note) Use this product by installing it on a mounting surface having heat dissipating characteristics equivalent to those of an aluminum plate of w450mm × d450mm × t12mm in size. If the installation conditions necessitate lower heat dissipating characteristics, please consult IAI.

\* For models with brake and cable exit direction to the bottom, a clearance hole is required.

### Installation Orientation

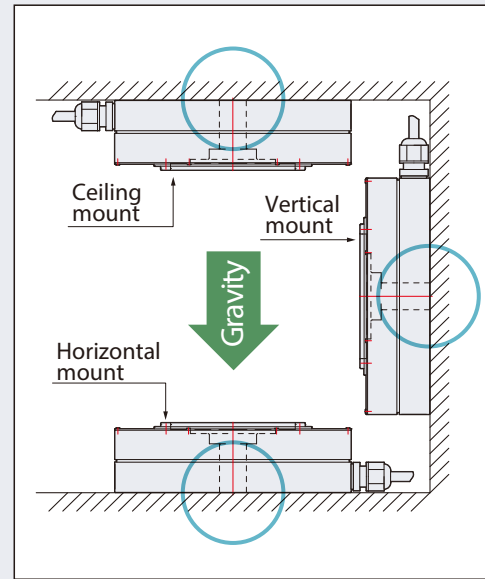

### ■ Operation Type

This product is available in 2 operation types depending on the operation conditions. Please check the features and precautions on each type before use.

Operation type	Index absolute type		Multi-rotation absolute type	
Controller type	SCON-CB	XSEL(*1)	SCON-CB	XSEL(*1)
Operation range	0~359.999°		±9,999° (±2,520°) max.	
Maximum amount of movement in a single movement command	360°	180°(*2)	Above operation range	
Limitless rotation	Yes (*3)		No	
Home return operation	Not required		Not required (*4)	
Absolute battery	Not required		Required	

(\*1)The high resolution specification can be connected only to the SCON-CB

(\*2)When the XSEL index type travels more than 180° from the current position, it rotates in a direction that requires a shorter travel distance to reach the target position.

Therefore, please note that the direction of rotation changes according to the current position and travel distance.

If you want to specify the direction of travel, use the SCON-CB.

(\*3)The index type can be rotated in a given direction infinitely, but it actually cannot continue to rotate in the same direction without stopping, like a regular motor does, because the maximum travel distance per command from the XSEL controller is 180°.

If you want to allow the motor to rotate continuously, use the SCON-CB.

(\*4)Home return is required for the multi-rotation absolute encoder during the initial setting and replacement of the absolute battery.

### ■ Controllers

- For the DDA with 200W motor, the outside dimensions of the SCON-CB controller will be the same as the size of the 400W motor. (Please contact IAI for the details of the SCON-CB controller.)
- One and two regenerative resistor unit(s) are required for LT18C□ and LH18C□ respectively to operate a DDA motor with the SCON-CB.
- When operating DDA motor(s) with the XSEL controller, regenerative resistor units are required as shown below.

Number of DD motor(s)		1	2	3	4	5	6	7	8
Number of regenerative resistor units	LT18C□	1		2		3		4	
	LH18C□	2	4	(Cannot be connected)					

- The number of DDA motor(s) connectable to the XSEL controller is a max. of 8 units for the LT18C type, and a max. of 2 units for the LH18C type.
- Please note that, when the DDA motor is operated with the SCON-CB, the motor cannot be connected to the ROBO Cylinder gateway function of the XSEL controller.
- Calculation for the power supply value: LT18C type: single-phase 600W, three-phase 200W. LH18C type: single-phase 1,200W, three-phase 600W.

# Selecting the DD Motor

## Conditions for Selection


The followings should be checked to determine whether the DDA motor can be used to suit the specific conditions required by the customer:

### 1 Check Load Conditions


The customer should confirm that the following three points under actual use do not exceed their maximum allowable levels as specified for the DDA motor.

<b>[1] Thrust load</b>	The <b>total load</b> of device(s) mounted on the actuator
<b>[2] Load moment applied</b>	The <b>total load moment</b> of device(s) mounted on the actuator
<b>[3] Load inertia</b>	The <b>load inertia</b> of device(s) mounted on the actuator


$$J = 1/8 \times M \times D^2 \text{ [kg} \cdot \text{m}^2 \text{]}$$




$$J = M \times R^2 + 1/8 \times M \times D^2 \text{ [kg} \cdot \text{m}^2 \text{]}$$



$$J = 1/12 \times M \times (a^2 + b^2) \text{ [kg} \cdot \text{m}^2 \text{]}$$




$$J = M \times R^2 + 1/12 \times M \times (a^2 + b^2) \text{ [kg} \cdot \text{m}^2 \text{]}$$




### 2 Check Operating Conditions

Check the distance, speed, acceleration, deceleration, stop time and other conditions in actual operation against the DDA motor specifications to determine whether the DDA motor can be used under the applicable operating conditions. Please contact IAI for assistance.

#### Continuous Operation Area



LT18C□ type



LH18C□ type

### 3 Travel Time Guide

The travel time changes according to the load inertia. See the tables below to check the travel time data.

\* The data in the tables are for a reference only and do not guarantee the actual travel times.

#### LT18C□

Load inertia lower limit [kg·m <sup>2</sup> ]	0	0.005	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.1	0.2	0.3	0.4	0.5
Load inertia upper limit [kg·m <sup>2</sup> ]	0.005	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.1	0.2	0.3	0.4	0.5	0.6
45° travel time [sec.]	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.17	0.19	0.21	0.23	0.39	0.62	0.70	0.87	1.11
90° travel time [sec.]	0.12	0.12	0.14	0.16	0.17	0.18	0.20	0.22	0.24	0.26	0.29	0.48	0.73	0.83	1.02	1.23
180° travel time [sec.]	0.17	0.17	0.19	0.21	0.23	0.24	0.27	0.29	0.32	0.35	0.37	0.60	0.89	1.01	1.22	1.42
270° travel time [sec.]	0.22	0.22	0.24	0.26	0.27	0.29	0.32	0.35	0.38	0.41	0.44	0.69	1.00	1.14	1.36	1.68

(Note) The time listed in the above table is the duration from the reception of a travel command until convergence within the positioning band of 0.028 degrees (approximately 100 arcseconds).

#### LH18C□


Load inertia lower limit [kg·m <sup>2</sup> ]	0	0.005	0.01	0.02	0.02	0.03	0.04	0.06	0.08	0.10	0.15	0.2	0.3	0.4	0.6	0.8	1.0	1.2	1.4
Load inertia upper limit [kg·m <sup>2</sup> ]	0.005	0.01	0.015	0.02	0.03	0.04	0.06	0.08	0.1	0.15	0.2	0.3	0.4	0.6	0.8	1	1.2	1.4	1.8
45° travel time [sec.]	0.098	0.096	0.096	0.097	0.099	0.104	0.113	0.12	0.126	0.14	0.157	0.207	0.257	0.352	0.447	0.53	0.629	0.795	0.875
90° travel time [sec.]	0.129	0.128	0.127	0.128	0.131	0.136	0.144	0.153	0.163	0.184	0.208	0.268	0.329	0.44	0.549	0.646	0.758	0.941	1.035
180° travel time [sec.]	0.192	0.19	0.19	0.191	0.193	0.199	0.207	0.215	0.225	0.249	0.279	0.354	0.428	0.562	0.692	0.806	0.933	1.133	1.257
270° travel time [sec.]	0.254	0.252	0.252	0.253	0.256	0.262	0.27	0.278	0.288	0.312	0.341	0.42	0.504	0.655	0.8	0.925	1.064	1.274	1.415


(Note) The time listed in the above table is the duration from the reception of a travel command until convergence within the positioning band of 0.028 degrees (approximately 100 arcseconds).

# Cables

Model Number **CB-X-MA**

\* Please indicate the cable length (L) in □□□, maximum 30m, e.g.) 080 = 8m

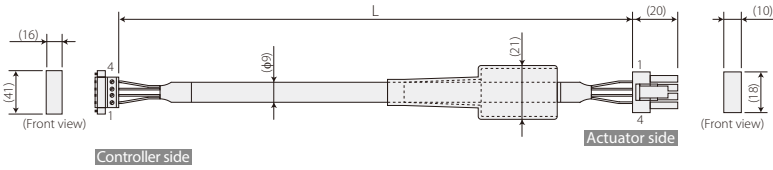


Wiring	Color	Signal	No.		No.	Signal	Color	Wiring
0.75sq	Green	PE	1		1	U	Red	0.75sq (crimped)
	Red	U	2		2	V	White	
	White	V	3		3	W	Black	
	Black	W	4		4	PE	Green	

Minimum bending radius  $r = 51\text{mm}$  or more  
(Dynamic bending condition)  
\* Only robot cable is available for this model.

Model Number **CB-XMC-MA**

\* Please indicate the cable length (L) in , maximum 30m, e.g.) 080 = 8m

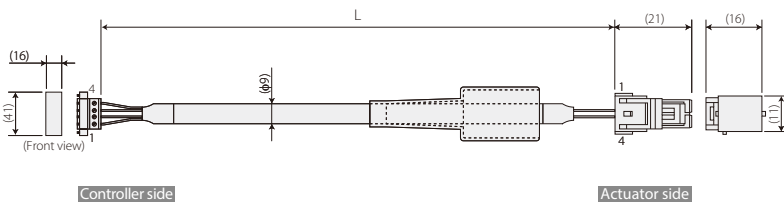


Wiring	Color	Signal	No.	No.	Signal	Color	Wiring
1.25sq	Green	PE	1	1	U	Red	1.25sq (crimped)
	Red	U	2	2	V	White	
	White	V	3	3	W	Black	
	Black	W	4	4	PE	Green	

Minimum bending radius  $r = 55\text{mm}$  or more  
(Dynamic bending condition)  
\* Only robot cable is available for this model.

Model Number **CB-X3-PA**   

\* Please indicate the cable length (L) in , maximum 30m, e.g.) 080 = 8m

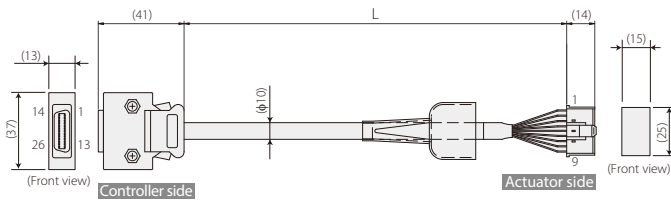

Wiring	Color	Signal	No.
—	—	—	10
—	—	—	11
—	—	—	12
—	—	E24V	13
White/Green	—	OV	14
White/Orange	—	LS	20
—	—	CHIEP	21
—	—	OT	24
—	—	RSV	25
—	—	—	3
—	—	—	9
—	—	—	18
—	—	—	19
White/Blue	—	A+	1
White/Yellow	—	A-	2
White/Black	—	B+	3
White/Red	—	B-	4
White/Purple	—	Z	5
White/Green	—	P	6
White/Orange	—	LS+	9
Green	—	SD+	8
Purple	—	BAT+	14
Gray	—	BAT-	15
Red	—	VCC	16
Black	—	GND	17
Blue	—	BKR-	20
Yellow	—	BKR+	21
Shield is clamp connected to the hood			


  

No.	Signal	Color	Wiring
1	A	White/Blue	
2	A	White/Yellow	
3	B	White/Black	
4	B	White/Red	
5	Z	White/Purple	
6	P	White/Green	
9	LS+	White/Orange	
8	SD	Green	
9	FG	Orange	
10	SD	Orange	
11	SD	Green	
12	BAT+	Purple	
13	BAT-	Gray	
14	VCC	Red	
15	GND	Black	
16	LS-	Blue	
17	BKR-	Yellow	
18	BKR+	Yellow	

Minimum bending radius  $r = 58\text{mm}$  or more  
(Dynamic bending condition)  
\* Only robot cable is available for this model.

Model Number **CB-DDB-BK**

\*\* Please indicate the cable length (L) in   , maximum 20m, e.g.) 080 = 8m

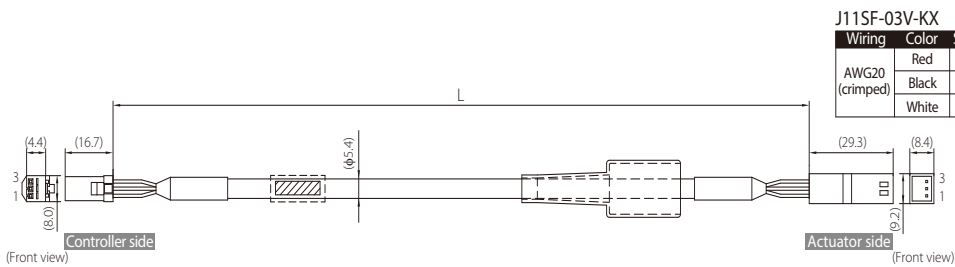

Wiring	Color	Signal	No.
AWG20 (crimped)	Red	+	3
	Black	-	2
	White	FG	1

No.	Signal	Color	Wiring
3	+	Red	AWG20 (crimped)
2	-	Black	
1	FG	White	

**IAI America, Inc.**

**Headquarters:** 2690 W. 237th Street, Torrance, CA 90505 (800) 736-1712  
**Chicago Office:** 110 E. State Pkwy, Schaumburg, IL 60173 (800) 944-0333  
**Atlanta Office:** 1220 Kennestone Circle, Suite 108, Marietta, GA 30066 (888) 354-9470

**[www.intelligentactuator.com](http://www.intelligentactuator.com)**

The information contained in this product brochure  
may change without prior notice due to product improvements.

**IAI Industrieroboter GmbH**

Ober der Röth 4, D-65824 Schwalbach am Taunus, Germany

**IAI (Shanghai) Co., Ltd.**

Shanghai Jiahua Business Center A8-303, 808,  
Hongqiao Rd., Shanghai 200030, China

**IAI Robot (Thailand) Co., Ltd.**

825 Phairojkiija Tower 12th Floor, Bangna-Trad RD.,  
Bangna, Bangna, Bangkok 10260, Thailand